


PrintaGlue

PrintaGlue is a universal superglue that has been chosen to work with a wide variety of 3D printing materials. It combines strength, quality, and durability for perfect results. It is always good to have Superglue in next to your 3D printer, as you never know when you will need a quick repair. PrintaGlue comes in easily portable 10g bottles, which last for many secure connections.



Application

The contact surfaces should be dry and free of contamination like oil or grease. Apply the adhesive sparingly to one surface. Press together immediately. Hold in place for 15 to 30 seconds until bond sets. Let product rest for a while to give the glue time to fully harden. After 24h the bond has been fully set.

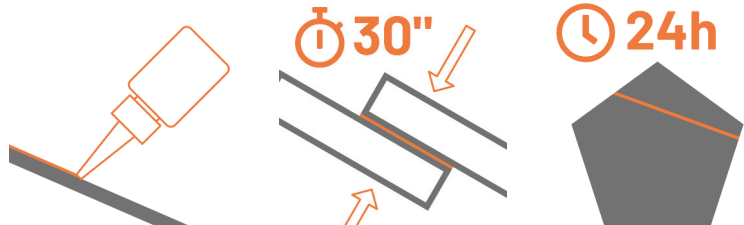

Works with the following materials

	PLA	PET-G	M-ABS	WOOD	PC	PC-ABS	FLEX HARD	PET-G CF20	PA12
PLA	+++	+++	+++	+++	++	++	+	++	+
PET-G	+++	+++	+++	+++	++	++	+	++	+
M-ABS	+++	+++	+++	+++	++	++	+	++	+
WOOD	+++	+++	+++	+++	+	++	+	++	+
PC	++	++	++	+	+	++	+	++	+
PC-ABS	++	++	++	++	++	++	+	++	+
FLEX HARD	+	+	+	+	+	+	+	+	+
PET-G CF20	+++	+++	+++	++	++	++	+	+	+
PA12	+	+	+	+	+	+	+	+	+

Hazard and precautionary statements

Warning: Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation. Cyanoacrylate. Danger. Bonds skin and eyes in seconds. Keep out of the reach of children. Wear protective gloves/protective clothing/eye protection/face protection. IF ON SKIN: Wash with plenty of water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a POISON CENTER/doctor/if you feel unwell. Specific treatment (see instructions on this label).



[Download MSDS](#)